



# Alcatel POP C9 OT7047 Touch Screen Glass Digitizer Replacement

Alcatel POP C9 OT7047 Touch Screen Glass Digitizer Replacement

Written By: ZFix



## INTRODUCTION

\_\_\_\_\_ Video tutorial: \_\_\_\_\_

[video: <https://www.youtube.com/watch?v=DHmEST3S1BE>]



### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [adhesive tape 3 mm](#) (1)



### PARTS:

- [Alcatel POP C9 touch screen](#) (1)
-

## Step 1 — Battery Cover Removal




- The Battery / Back cover is secured to the main frame by plastic clips.
- Use a plastic tool to remove it.

## Step 2 — Battery Disconnecting 1





- Use a Phillips screwdriver and remove the two screws secured the battery connector shield.
- With tweezers careful remove the battery connector shield.

## Step 3 — Battery Disconnecting 2

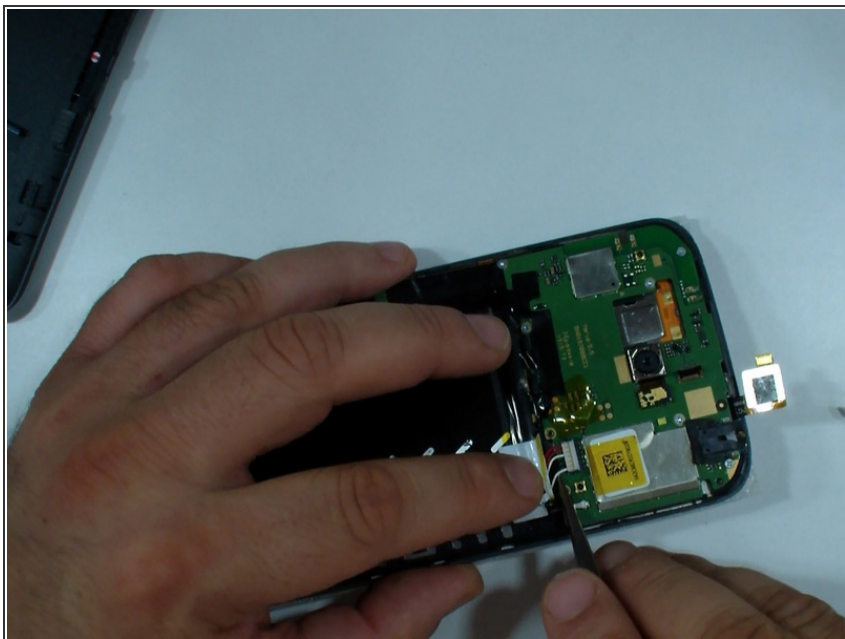

- Disconnect the battery cable.



## Step 4 — Main Board removal 1

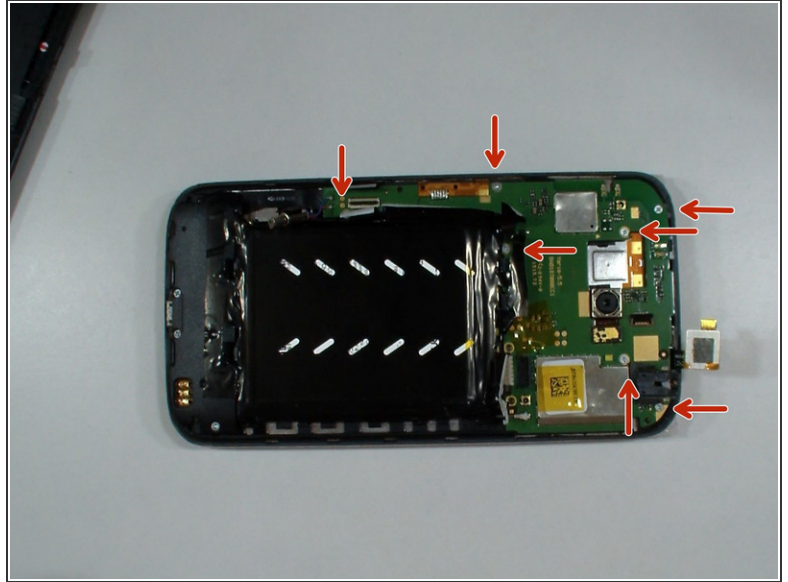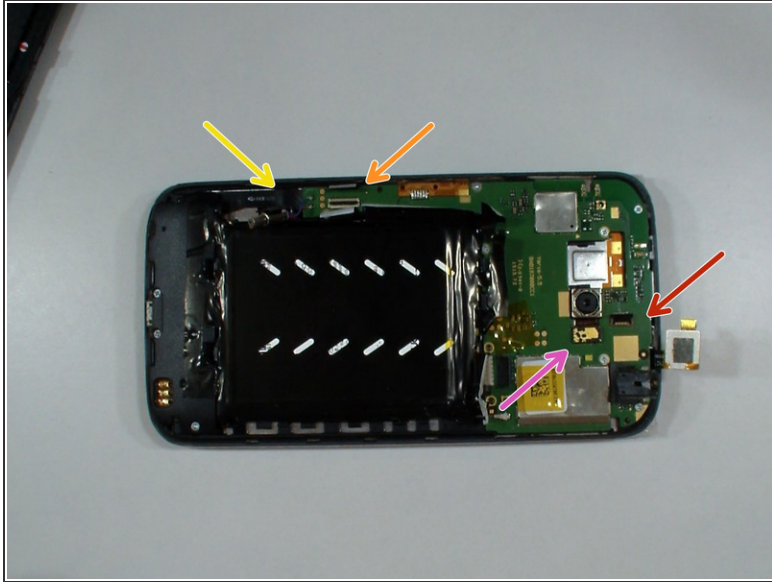

- Disconnect:
  - Touchscreen flex cable
  - Main Camera flex cable
  - LCD flex cable
  - Vibra-motor
- New line.Remove 7x Phillips screws.



## Step 5

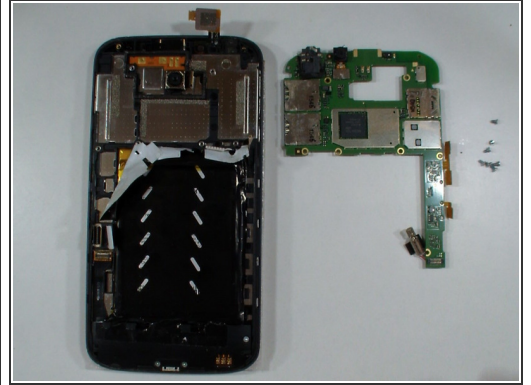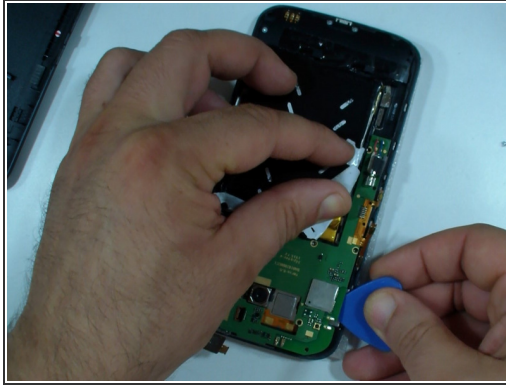


- Careful unstuck the Volume buttons flex cable and the Power button flex cable.
- Use a plastic tool and remove the Logic board.

## Step 6 — Touch screen glass removal




- Use a hair dryer to warm the glass to soften the adhesive.
- Use a knife or tool with a sharp edge and start the separating the glass from the frame.
- Continue with a plastic tool.

## Step 7

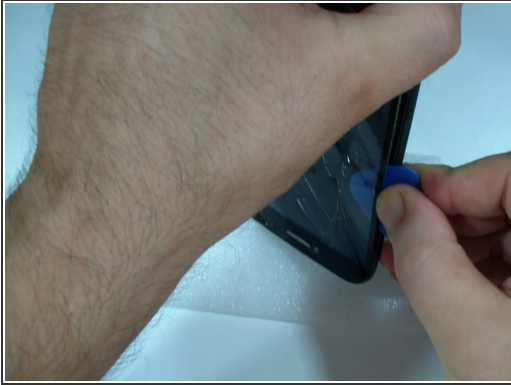

- Insert wisdom here.

## Step 8

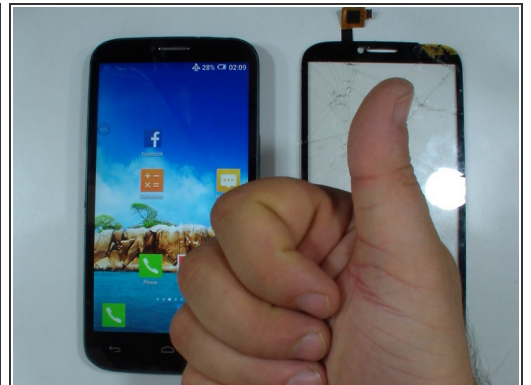

- Clean the frame and install a new adhesive tape.
- Install the touch screen.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-17 09:44:21 PM.